

Series 4, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel (with anti-fingerprint) KGN36VIDA



Included accessories

3 x egg tray
1 x ice cube tray

The No Frost bottom freezer with VitaFresh: Keeps your fresh foods fresh longer.

- **VitaFresh:** keeps food fresh for longer in climate controlled drawers at near 0°C.
- **Perfect Fit:** place your fridge right next to walls or in a niche.
- **LED lighting:** keep your groceries in perfect view.
- **Easy Access Shelf:** pull-out glass shelf gives you better access to the contents of your fridge.
- **Super Cooling function:** cools new food placed inside faster, thus protecting already cooled food.

Technical Data

Energy Efficiency Class: D
 Average annual energy consumption in kilowatt hour per year (kWh/a): 191 kWh/annum
 Sum of volume of frozen compartments: 89 l
 Sum of volume of chill compartments: 237 l
 Airborne acoustical noise emissions : 36 dB(A) re 1 pW
 Airborne acoustical noise emission class: C
 Built-in / Free-standing: Free-standing
 Door panel options: Not possible
 Height: 1860 mm
 Width of the appliance: 600 mm
 Depth of the product: 660 mm
 Net weight: 71.2 kg
 Fuse protection: 10 A
 Door hinge: Right reversible
 Voltage: 220-240 V
 Frequency: 50 Hz
 Length electrical supply cord: 240.0 cm
 Number of compressors: 1
 Number of independent cooling systems: 2
 Interior ventilator: No
 Reversible Door Hinge: Yes
 Number of Adjustable Shelves in fridge compartment: 2
 Shelves for Bottles: Yes
 Installation typology: N/A



Series 4, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel (with anti-fingerprint) KGN36VIDA

The No Frost bottom freezer with VitaFresh: Keeps your fresh foods fresh longer.

Performance and consumption

Design and Styling

- Doors inox EasyClean, side panels Pearl grey (VZF 07127)
- Integrated vertical handle
- LED with Soft Start in fridge section

Convenience & Safety

- NoFrost
- Separate, electronic temperature control, LED indicators
- Two Cooling Systems
- Super Cooling: automatic deactivation
- Optical and acoustic door open warning system
- Visual and acoustic warning system in case of malfunction of the freezer compartment

Fridge Compartment

- Multi Airflow-System
- 4 PC safety glass shelves of which 2 are height adjustable
- Bottle storage: Bottle grid
- 1 door bin(s) high, 2 door bin(s) small

Freshness System

- 1 VitaFresh drawer with humidity control - Fruits and vegetables retain vitamins and stay fresh for longer., 2 VitaFresh ◀0°C▶ drawers with temperature control - Fish and meat stay fresh for longer with humidity control - keeps fruit and vegetables fresh

Freezer

- 3 transparent freezer drawers

Dimensions

- Appliance Dimensions (H x W x D): 186 cm x 60 cm x 66.0 cm

Technical Information

- Door right hinged, reversible
- Height adjustable front feet
- Nominal voltage: 220 - 240 V

Accessories

- egg tray
ice cube tray
- egg tray
ice cube tray

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.

Environment and Safety



Installation

General Information

- Energy Class: D
- Total Volume: 326 l
- Net Fridge Volume : 237 l
- Net Freezer Volume : 89 l
- Freezing capacity 24h: 10 kg
- Annual Energy Consumption: 191 kWh/a
- Climate Class: SN-T
- Fast Freeze Facility
- Noise Level : 36 dB , C Class
- Temperature rise time : 13 H

**Series 4, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel (with anti-fingerprint)
KGN36VIDA**

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700

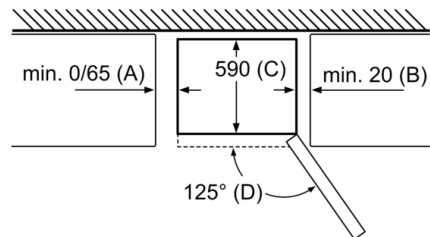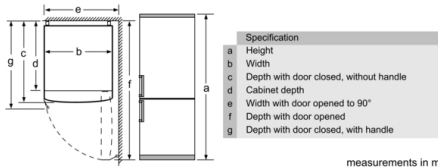

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:
In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm